


Stop Trottoir LED : Fiche technique

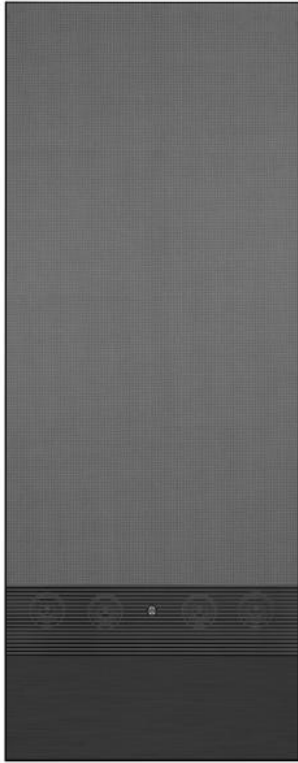

Model No.	P 1.5	P 2.5	P 2.3
LED Encapsulation	SMD 1010	SMD 1415	
Pixel Pitch	1.56 mm	1.95 mm	2.3 mm
Module Size	250 mm x 250 mm		
Module Resolution	160 X 160	128 X 128	108 X 108
Pixel Density (Full Screen)	20,480,0 dot	13,107,2 dot	9,331,2 dot
Max. Equilibrium Balance	5000 cd/m ²		
Grey Level	12 bits		
Color Temperature	6,500 - 9,500		
Viewing Angle	160°		
Scan Mode	1 / 40 scan	1 / 32 scan	1 / 27 scan
Brightness Level	Automatic (Auto ISO)		
Repetition Frequency	60 Hz		
Refresh Rate	7,680 Hz		
LED Control System	NOVA STAR		
Battery Capacity	70 Ah		
Input Voltage	9v-36v		
Charging Hours	5 Hours		
Hours of Service	10-12 Hours		
Application	IP 65		
Temperature / Humidity	-20°C ~ +70°C, 10%-95%		
Display Size	500mm(H) x 1,000mm(V) (43 inch)		
Service	Front & Rear Dual Service		
Weight (Include Battery)	55KG		
Overall Size	1310mm (V) x 505mm (H) x 45mm (T) (Battery Pack 210mm)		